

Time to color your presence


FINGERTEC



Q2i & TA200 Plus
Fingerprint Color Time Attendance & Door Access System



FingerTec's Q2i & TA200 Plus are astounding hi-tech fingerprint time attendance and door access devices with an impressive design. With an exceptional storage capacity and equipped with the latest precision fingerprint scanning algorithm VX10.0, the Q2i & TA200 Plus give you some amazing and convenient features such as work codes and short message display for either personal or public recipients for effective staff communication. The terminals also come with many options and methods for you to sync your terminal to the bundled software, FingerTec's TCMS V2 for further processing of attendance data to ease report generating and payroll processes.



Full Colour Screen

Treat your eyes to a full colour TFT screen! Display pictures, corporate advertisements, screen savers and much more on the color screen of the terminals.



Built-In Alarm

Increase the security at your workplace by installing an external alarm, and be alerted during unexpected scenarios such as break-ins and fire emergencies.



Easy Terminal Syncing

With the option of TCP/IP, RS485 / RS232, USB flashdisk, or even WiFi (upon request), syncing your terminal is even easier than you think!



Function Keys

Program these keys to take you to commonly used functions in just one step. Did we mention that we make things easy?



Simple Workcodes for Attendance Monitoring

Give your staff some flexibility by allowing them to report their attendance status by simply punching in a 2-digit code into the terminals.



Superb Capacity

With the latest precision algorithm, fingerprint scanning does not only become quicker and more accurate, but it can also hold up to 12,000 fingerprint templates and 200,000 transaction logs.



A Variety of Verification Methods

Although it's recommended that you use fingerprint verification for more authentic attendance and access control functions, the terminals also offer options for you to verify using a card or password, or even a combination of the two!



Manage Your Data Easily

Administration is easy with the bundled software! FingerTec's TCMS V2 software allows you to generate reports, monitor attendance, and integrate FingerTec with a third party system.

WEB LINK

Product

- <http://info.fingertec.com/q2i-1>
- <http://info.fingertec.com/ta200p-1>

Quick Start Guide

- <http://info.fingertec.com/q2i-2>
- <http://info.fingertec.com/ta200p-2>

Installation Guide

- <http://info.fingertec.com/q2i-3>
- <http://info.fingertec.com/ta200p-3>

User Guide

- <http://info.fingertec.com/q2i-4>
- <http://info.fingertec.com/ta200p-4>

Video Guide

- <http://info.fingertec.com/q2i-5>
- <http://info.fingertec.com/ta200p-5>

Technical Tips

- <http://info.fingertec.com/q2i-6>
- <http://info.fingertec.com/ta200p-6>



Packaging

Q2i
Dimension (mm) : 245(L) x 90(W) x 225(H)
Weight : 2.9kg (with AdapTec AC)
1.8kg (without AdapTec AC)

TA200 Plus
Dimension (mm) : 245(L) x 90(W) x 225(H)
Weight : 1.7kg




FINGERTEC
www.fingertec.com

© 2011 FingerTec Worldwide Sdn. Bhd. All rights reserved.

LAYOUT PLAN


System Communication

for illustration only

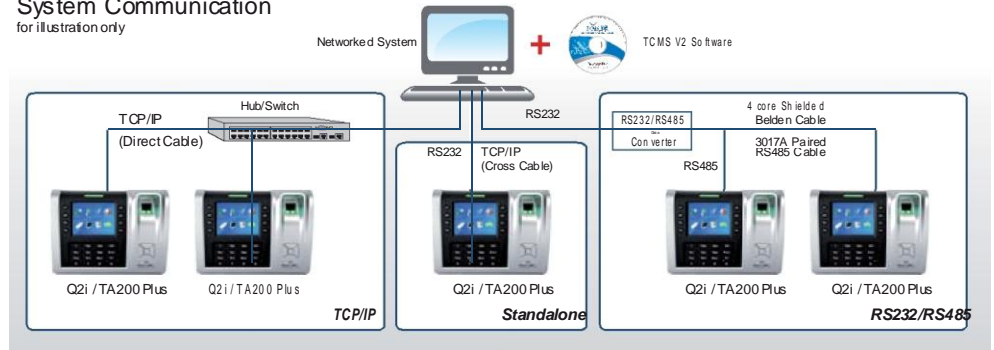

Installation Diagram (for Q2i only)

for illustration only

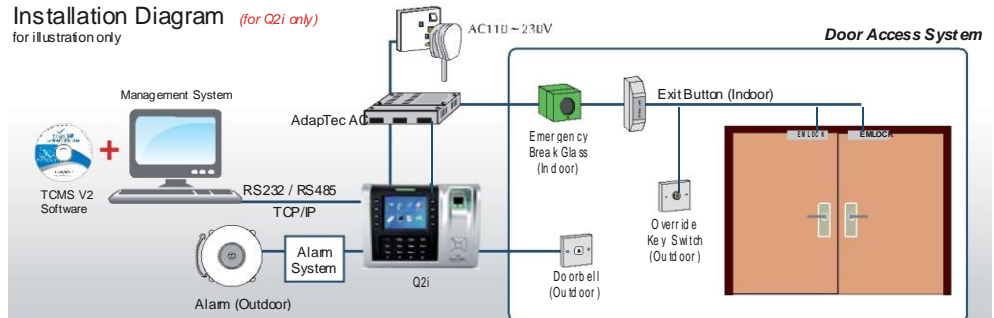

SPECIFICATIONS

MODEL	Q2i	TA200 Plus
SURFACE FINISHING	Acrylonitrile Butadiene Styrene (ABS)	
TYPE OF SCANNER	Optical	
PROCESSOR	400 MHz microprocessor	
MEMORY	256MB flash memory	
ALGORITHM	BioBridge VX 9.0 / VX 10.0	
PRODUCT DIMENSION (L X W X H), mm	200 x 56 x 160	
STORAGE		
• User Capacity	10000	
• Transaction	200000	
ENROLLMENT & VERIFICATION		
• Methods	Fingerprint (1:1, 1:N), Card & Password	
• Card per user ID	2	
• Reading distance, mm	Any angle	
• Verification time (sec)	< 1	
• FAR (%)	< 0.0001	
• FRR (%)	< 1	
CARD TECHNOLOGY		
• RFID: 64-bit, 125kHz	Yes	
• MIFARE: MFIS50/S70, 13.56MHz	Made to order	
• HID: HID 1325, 26-bit, 125kHz	Made to order	
COMMUNICATIONS		
• Method	TCP/IP, RS232, RS485, USB flash disk, (Optional WiFi)	TCP/IP, USB flash disk, (Optional RS232, RS485, WiFi)
• Baud rates	9600, 19200, 38400, 57600, 115200	
• Wiegand	26-bit input/output	N/A
OPERATING ENVIRONMENT		
• Temperature (°C)	0 ~ 45	
• Humidity (%)	20 ~ 80	
• Power input	DC12V 3A	
TIME ATTENDANCE		
• Siren	Built-in (Optional - External)	Built-in and External
• Work codes	Yes	
MULTIMEDIA		
• Voice	Yes	
• Display	3.5" 65k color TFT screen	
• Short messaging	Yes	
ACCESS CONTROL		
• EM lock driving output	DC12V 3A / Relay output	N/A
• Alarm output	NO / NC	N/A
• Antipassback	Yes	N/A
VOICE / DISPLAY LANGUAGE (TERMINAL)	English (Standard) / (Upon Request - Arabic / Indonesian / Spanish / French / German / Chinese Traditional (Cantonese) / Chinese Traditional (Mandarin) / Dutch / Portuguese / Italian / Russian / Thai / Korean / Vietnamese / Bulgarian / Spanish / Greek / Hebrew / Polish / Romanian / Slovak / Turkish / Malay	
SOFTWARE LANGUAGE	English, Arabic, Malay, Indonesian, Chinese (Traditional), Chinese (Simplified), Thai, Spanish, Portuguese (Brazil), Polish, Vietnamese, French, Russian, Persian, German, Italian, Turkish	

*N/A: Not applicable

Authorized Reseller:

AlphaBIZ
Solutions

Tel: 08 9277 2226
Email: admin@alphabiz.com.au
Web: www.alphabiz.com.au